

DESIGN OF RING COUPLED MICROSTRIP ANTENNA WITH U SHAPED SLOT

K. Prahlada Rao¹, Vani R.M², P. V. Hunagund³

¹Gulbarga University, India

²Gulbarga University, India

³Gulbarga University, India

¹pra_kaluri@rediffmail.com, ²prahladielts@yahoo.co.in, ³pra.shr124@gmail.com

Keywords: bandwidth, center patch, microstrip patch antenna, ring coupled, u slot, center patch.

Abstract: This paper discusses the design of a ring coupled rectangular microstrip patch antenna at a design frequency of 2 GHz for wireless applications. Additionally the effect of U-shaped slot on ring and centre path is also studied. The microstrip patch antenna is excited using strip line feeding method. The antenna is mounted on a FR-4 glass epoxy substrate. The antennas are designed and simulated using Mentor Graphics IE3D simulation software. The antennas have been fabricated and the measured results agree with the simulated results. Highest bandwidth and sizable virtual size reduction of 12.54 and 20.53 % are obtained.

1. INTRODUCTION

An antenna is defined as an electrical device used to transmit and receive electromagnetic waves. Thus antenna is regarded as a transition between free space and the system used for launching electromagnetic waves. [1]. Antenna can be employed as transmitting or receiving antenna. It has directional properties. It is considered as an important component of wireless communication system. [2]. The concept of radiation Microstrip resonators was proposed about three decades ago. Since then tremendous research and development has taken place which resulted into diverse range of applications. [3]. With the increase in the role of microstrip patch antennas in various fields of science and technology, these antennas have become one of the most sought after antennas. [4]. Use and demand for microstrip patch antennas has been increasing manifold. Microstrip patch antennas have become one of the active fields of research. Microstrip antennas have become the serious field of research because of their advantages - light weight, planar structure, ease of fabrication and ease of integration with other devices. [5-6]. One of the

major limitations of microstrip patch antennas is they have narrow bandwidth. Microstrip patch antennas are also called as printed antennas because they can be printed directly on a circuit board. [7].

A microstrip patch antenna basically consists of a sandwich of two parallel conducting layers separated by a single dielectric substrate. The patch conductors are normally of gold or copper. The lower conductor functions as a ground plane and the upper conductor is a simple patch of any desired shape. [8-9]. The substrates whose dielectric constant lies between 2.2 and 12 are used for microstrip antennas. The numerous advantages associated with microstrip antennas has resulted into establishing the microstrip antenna as a separate entity in the broad field of microwave antennas. The invention of microstrip antenna is certainly a windfall to the antenna designers. [10]. The rest of the paper has been organized as follows: The design of the following microstrip patch antennas – conventional rectangular microstrip antenna (CRMA), proposed ring coupled rectangular microstrip antenna (PRCRMA), proposed ring coupled rectangular microstrip antenna with U-slot on ring (PRCRMAUR) and proposed ring

coupled rectangular microstrip antenna with U-slot on centre patch (PRCRMAUP) has been dealt in Section 2. Section 3 discusses the simulated and measured results obtained. Concluding remarks are given in Section 4 and the paper ends with references.

2. DESIGN OF MICROSTRIP ANTENNAS

The design of conventional rectangular microstrip antenna (CRMA) is carried out at the frequency of 2 GHz. The dimensions of the radiating patch are 46.5 mm × 36.2 mm. The dielectric substrate employed to design the microstrip antennas is FR-4 glass epoxy which has dielectric constant of 4.2 and loss tangent of 0.0245 respectively. The height of the substrate is 1.6mm. Fig. 1 depicts the schematic of CRMA. Table 1.1 shows the dimensions and values of different parts of CRMA. The formulae employed to determine the dimensions of parts of CRMA are taken from the literature review.

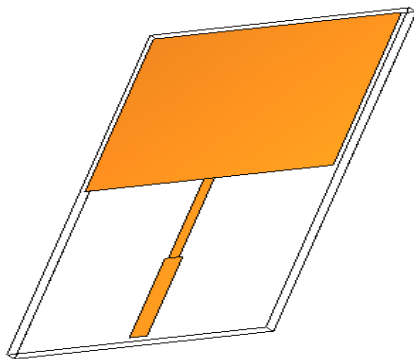


Fig. 1 Schematic of CRMA.

Table 1.1 Dimensions and values of CRMA.

| Dimension | Value (mm) |
|--|------------|
| Length of the patch | 46.5 |
| Width of the patch | 36.2 |
| Length of the feed | 18.8 |
| Width of the feed | 3.32 |
| Length of the quarter wave transformer | 18.8 |
| Width of the quarter wave transformer | 1.278 |

CRMA is modified to design proposed ring

coupled rectangular microstrip antenna (PRCRMA). The schematic of PRCRMA is depicted in Fig. 2.

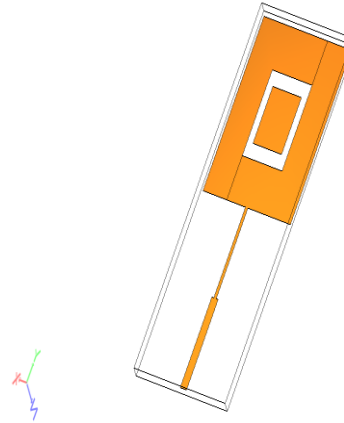


Fig. 2 Schematic of PRCRMA.

The length and width of the outer ring of PRCRMA are equal to 21.11 mm and 17.41 mm respectively. The length and width of the inner ring are equal to 15.21 and 11.41 mm respectively. The other dimensions of PRCRMA are same as that of CRMA.

PRCRMA is modified to design proposed ring coupled rectangular microstrip antenna with U-slot on centre patch (PRCRMAUP). The schematic of PRCRMAUP is shown in Fig. 3.

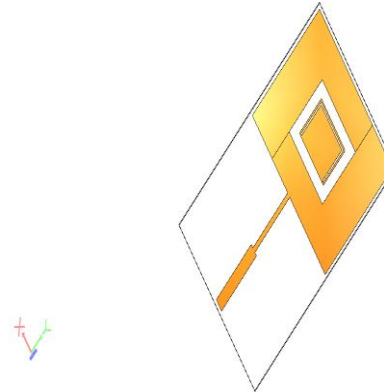


Fig. 3 Schematic of PRCRMAUP

The length and width of the left part and right part of the U-slot inside the ring of PRCRMAUP are 10.41 mm and 0.5 mm respectively. The dimensions of the centre part of the U-slot are 14.21 mm × 0.5 mm. The other dimensions of PRCRMAUP are same as that of PRCRMA and CRMA.

PRCRMAUP is modified to design proposed

ring coupled rectangular microstrip antenna with U-slot on ring (PRCRMAUR). The schematic of PRCRMAUR is shown in Fig. 4.

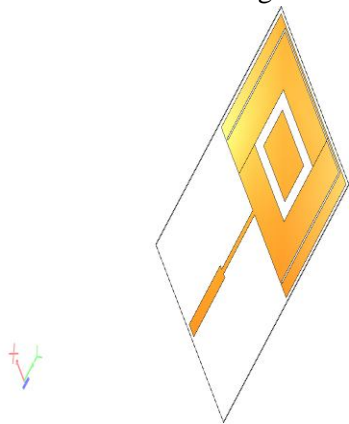


Fig. 4 Schematic of PRCRMAUR

The length and width of the left and right parts of the U-slot outside the ring of PRCRMAUR are equal to 35.2 mm and 0.5 mm respectively. The dimensions of the centre part of the U-slot are 45.2 mm \times 0.5 mm. The left and right parts of the U-slot are at a distance of 3.5mm from the sides of the rectangular patch. The other dimensions of the PRCRMAUR are same as that of PRCRMAUP, PRCRMA and CRMA.

The various dimensions of the parts of the proposed microstrip antennas are selected on a trial and error basis.

The designed antennas are fabricated and the photos of fabricated antennas are depicted in Fig. 5.

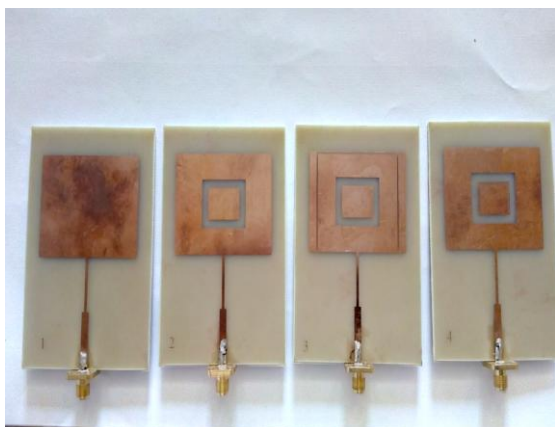


Fig. 5 Photos of fabricated antennas – CRMA, PRCRMA, PRCRMAUR and PRCRMAUP.

3. RESULTS AND DISCUSSION

The designed antennas are simulated using Mentor Graphics IE3D software. The following steps are realized to obtain the simulation results of the designed antennas.

1. To analyze the different parameters of designed antenna, the analysis setup is created first and the desired solution frequency is selected.
2. The next step is to assign the start frequency, stop frequency and the number of frequency points. This step is performed to generate the solution frequency across the frequency range.
3. Then the antenna is validated and analyzed using the simulation results generated.

The return loss and mutual coupling characteristics of the fabricated antennas are obtained by using German make Rohde and Schwarz (R&S) Vector Network Analyzer of ZVK model (10 MHz – 40 GHz). Initially the vector network analyzer is calibrated in the frequency range 1 - 6 GHz.

The fabricated antenna CRMA shown in Fig. 5 is employed to measure the return loss characteristics of CRMA.

The fabricated antenna is connected to the port 1 (through the female type SMA connector of fabricated antenna) of the vector network analyzer.

The same procedure is followed to measure the return loss characteristics of PRCRMA, PRCRMAUR and PRCRMAUP.

The simulated and measured return loss characteristics of CRMA, PRCRMA, PRCRMAUP and PRCRMAUR are depicted in Figs. 6, 7, 8 and 9. In the Figs. 6, 7, 8 and 9 the graph in red depicts the simulated results and the one in black depicts the measured results.

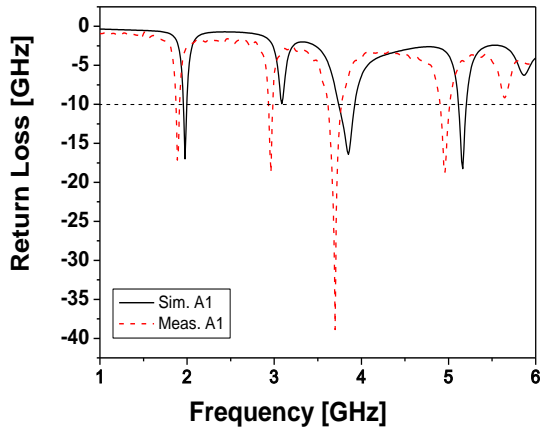


Fig. 6 Plot of return loss versus frequency of CRMA.

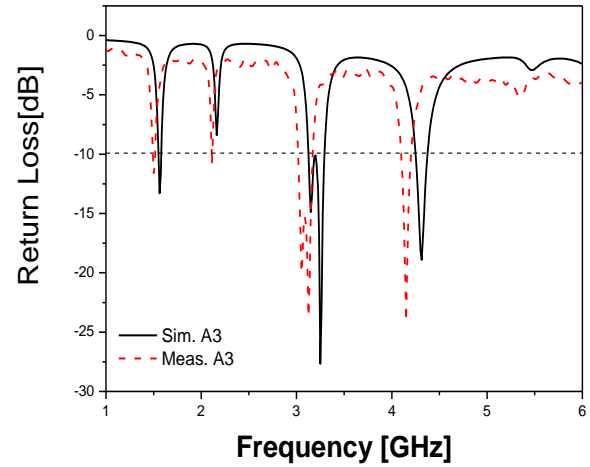


Fig. 9 Plot of return loss versus frequency of PRCRMAUR.

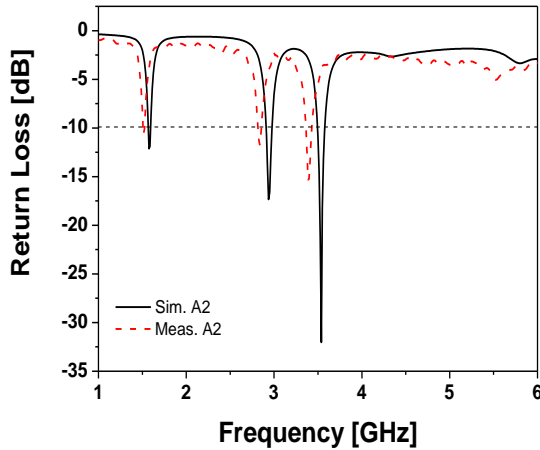


Fig. 7 Plot of return loss versus frequency of PRCRMA.

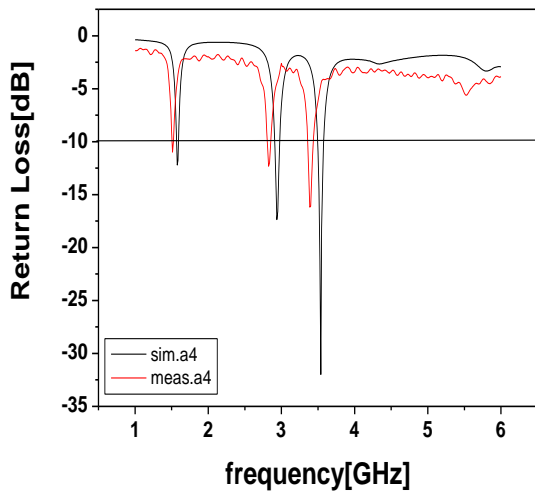


Fig. 8 Plot of return loss versus frequency of PRCRMAUP.

The photograph of the experimental setup employed to determine the return loss characteristics of the fabricated antennas is depicted in Fig. 10.

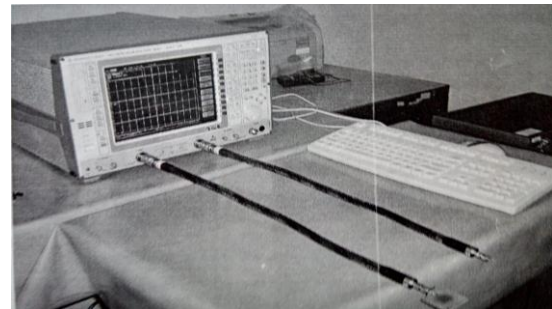


Fig. 10 Photograph of experimental setup for the measurement of return loss characteristics

The performances of the four antennas are compared in terms of parameters – return loss, resonant frequency, bandwidth and virtual size reduction are studied. Resonant frequency is defined as the frequency where the antenna is producing least return loss in between the lower and upper frequencies where the return loss is equal to -10 dB. The parameter bandwidth is determined by subtracting the lower frequency from the upper frequency where the return loss is equal to -10 dB on either side of resonant frequency. Bandwidth (%) is calculated by using equation (1)

$$\left(\frac{\text{Bandwidth}}{\text{Resonant Frequency}} \right) \times 100 \quad (1)$$

Among the four antennas, PRCRMAUR is producing highest measured bandwidth of 12.54 % compared to the other three antennas i.e. CRMA, PRCRMA and PRCRMAUP. The measured bandwidths produced by CRMA, PRCRMA and PRCRMAUP are equal to 4.22, 6.35 and 4.56 % respectively. The four antennas i.e. CRMA, PRCRMA, PRCRMAUP and PRCRMAUR are resonating at the measured fundamental frequencies of 1.88, 1.51, 1.51 and 1.5 GHz respectively. PRCRMAUR is producing the least resonant frequency compared to other three antennas. This contributes to virtual size reduction. Virtual size reduction (%) is calculated by using equation (2).

$$\left(\frac{f_1 - f_2}{f_1} \right) \times 100 \quad (2)$$

In equation (2), f_1 and f_2 designate the fundamental resonant frequencies of conventional and proposed antennas. Hence the virtual size reductions produced by PRCRMA, PRCRMAUP and PRCRMAUR are equal to 19.89, 20.01 and 20.53 % respectively. Thus PRCRMAUR is producing the best virtual size reduction value of 20.53 %.

Tables 1.2 and 1.3 show the simulated and measured results of return loss, resonant frequency and bandwidth of CRMA, PRCRMA, PRCRMAUP and PRCRMAUR.

Table 1.2 Simulated results.

| Antenna/Parameter | Resonant frequency (GHz) | Return loss (dB) | Bandwidth (MHz) | Bandwidth (%) |
|-------------------|--------------------------|------------------|-----------------|---------------|
| CRMA | 1.976 | -16.99 | 48 | 4.11 |
| | 2.98 | -18.11 | 22 | |
| | 3.64 | -37.22 | 70 | |
| | 4.9 | -19.33 | 60 | |
| PRCRMA | 1.575 | -12.18 | 52 | 9.53 |
| | 2.93 | -17.37 | 92 | |
| | 3.539 | -32.16 | 110 | |
| PRCRMAUP | 1.57 | -12.08 | 32 | 7.21 |
| | 2.939 | -17.33 | 77 | |
| | 3.537 | -31.95 | 91 | |
| PRCRMAUR | 1.567 | -13.36 | 35 | 10.92 |
| | --- | --- | --- | |
| | 3.248 | -27.72 | 180 | |
| | 4.31 | -18.88 | 136 | |

Table 1.3 Measured results.

| Antenna/Parameter | Resonant frequency (GHz) | Return loss (dB) | Bandwidth (MHz) | Bandwidth (%) |
|-------------------|--------------------------|------------------|-----------------|---------------|
| CRMA | 1.88 | -16.11 | 42 | 4.22 |
| | --- | --- | 26 | |
| | 3.92 | -17.11 | 75 | |
| | 5.1 | -17.14 | 65 | |
| PRCRMA | 1.512 | -10.76 | 40 | 6.35 |
| | 2.83 | -11.74 | 40 | |
| | 3.39 | -15.36 | 80 | |
| PRCRMAUP | 1.51 | -10.99 | 20 | 4.56 |
| | 2.82 | -12.30 | 50 | |
| | 3.38 | -16.18 | 50 | |
| PRCRMAUR | 1.5 | -11.61 | 40 | 12.54 |
| | 2.11 | -10.95 | 30 | |
| | 3.05 | -20.08 | 170 | |
| | 4.15 | -24.12 | 120 | |

Table 1.4 depicts the simulated and measured results of virtual size reduction of PRCRMA, PRCRMAUP and PRCRMAUR.

Table 1.4 Simulated and measured results

| Antenna | Simulated (%) | Measured (%) |
|----------|---------------|--------------|
| PRCRMA | 19.97 | 19.89 |
| PRCRMAUP | 20.32 | 20.01 |
| PRCRMAUR | 20.77 | 20.53 |

The results clearly illustrate that PRCRMAUR is yielding the highest measured bandwidth of 12.54 % and best virtual size reduction of 20.53 % compared to other antennas. Hence PRCRMAUR is the best candidate compared to its opponents i.e. CRMA, PRCRMA and PRCRMAUP. The simulated and measured results of all the designed antennas are in good agreement.

4. CONCLUSIONS

The antennas have been successfully designed, simulated and tested experimentally. With the introduction of U- slot on ring and patch has resulted in considerable decrease of resonant frequency of the microstrip antenna and subsequently causing virtual size reduction. Additionally, there is good improvement in bandwidth. The results obtained satisfy the requirements of wireless communications and the designed antennas can be employed in L band of microwave frequency region.

5. REFERENCES

- [1].Constantine, A. Balanis., Antenna theory, analysis and design, John Wiley & Sons Inc, 2nd ed, 1997.
- [2]. Avisankar, Roy., Sunandan, Bhunia., Debasree, C. Sarkar., Partha, P. Sarkar., "Slot loaded compact microstrip patch antenna for dual band operation", Progress in Electromagnetic Research C 73, 145-156, 2017.
- [3]. Soundarya, S., Meghana, S., Shanthi, P., "Design of dual band micro strip antenna for 2.4 GHz and 3.6 GHz", International Journal of Recent Technology and Engineering 8, 2404-2406, 2019.
- [4]. Amit, A. Deshmukh., Ray, K. P., "SA nalysis and design of broadband U-slot cut rectangular microstrip antennas", Sadhana 42, 1671-1684, 2017.
- [5]. Poonam, A. Kadam., Amit, A. Deshmukh., "Multiband microstrip antenna using modified pi-shape slot on ground plane", International Journal of Wireless and Microwave Technologies 1, 23-35, 2019.
- [6]. Zubair, Ahmed., Muhammad Mansoor, Ahmed., Mojeeb, Bin, Ihsan., "A novel differential fed high gain patch antenna using resonant slot loading", Radioengineering 27, 662-670, 2018.
- [7]. Apleen, Kaur., Jaswinder, Kaur., Naveen, Kumar., "Super wide-band slotted trishul-shaped microstrip patch antenna for wireless applications", International Journal of Engineering and Advanced Technology 8, 26-29, 2019.
- [8]. B. Neeththi, Aadithiya., N, V. Andrews., Manikandan, M., "Design of patch antenna with inverted U-slot for Wimax applications", Indian Journal of Science and Technology 11, 1-4, 2018.
- [9]. Rajan, S. P., Dinesh, T., "Analysis of human brain disorders for effectual hippocampus surveillance", International Journal of Modern Sciences and Engineering Technology 2, 38-45, 2015.
- [10].IE3D ver 14, Mentor Graphics software, USA.